

## PANAX RED 9350

### PRODUCT DESCRIPTION

Color Index	Pigment Red 104
C.I. No.	77605
Chemical Type	Lead Molybdate
CAS No.	12656-85-8
EU No.	235-759-9

### PHYSICAL DATA

Appearance	Red Powder	
pH (2% aqueous)	5 ~ 7	ISO 787-9
Specific gravity	5.4 g/cm <sup>3</sup>	ISO 787-10
Bulk volume	240cm <sup>3</sup> /100g	ISO 787-11
Oil absorption	23 g/100 g	ISO 787-5


### FASTNESS PROPERTIES

Acid	5	DIN EN ISO 20105-A03
Alkali	4	DIN EN ISO 20105-A03
Water	5	ISO 2836
Ethanol	5	ISO 2836
Xylene	5	ISO 2836
MEK	5	ISO 2836
DOP	5	ISO 2836
Heat / 150°C, 10 min	5	ISO 787-21
Heat/ 210°C, 10 min	5	ISO 787-21
Light 1/3 SD	8	ISO 105-B01
Light 1/25 SD	7	ISO 105-B01

### STANDARD PACKAGING

Paper bags	25 kg
Big Bags type C	On request

### FULL SHADE REDUCTION 1:25 TiO<sub>2</sub>

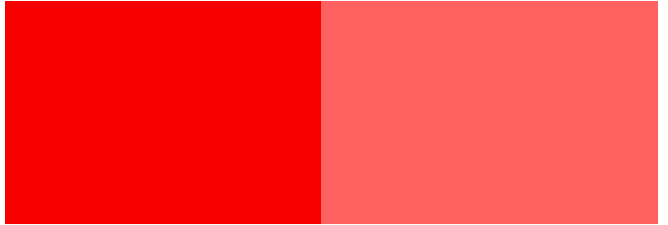

### CHEMICAL STRUCTURE OF THE PIGMENT



### APPLICATION RECOMMENDATION

Solvent gravure	-
Water base flexo	-
Offset	-
Paint (oil base)	recommended
Paint (water base)	-
Plastics	recommended

### REMARKS

Full-Coating type  
Good heat resistance & chemical resistance

Our product specific end application information are based upon our current knowledge. They are presented without any representation or warranty concerning the suitability, performance or correctness of the product for a particular application or use. Significant variations can occur between test results and results obtained in actual use. We strongly advise that the customer test the product in the specific intended application under conditions expected during use.

#### HEAD-OFFICE

#155-8, HAIDONG-DONG, KEUMJEONG-KU  
BUSAN, KOREA  
Tel.: +82 51 5231515 8  
Fax: +82 51 5296326  
Email: trade@ukseung.co.kr  
<http://www.ukseung.co.kr>

#### EUROPE OFFICE

UK SEUNG Europe GmbH Kirchrainstr. 7  
D-63762 Grossostheim, Germany  
Tel. : +49 6026 9997875  
Fax: +49 6026 9997881  
Email: info@ukseung-europe.de  
<http://www.ukseung-europe.de>