

**PANAX GREEN GY-2030**
**PRODUCT DESCRIPTION**

Color Index	Pigment Green 7
C.I. No.	74260
Chemical Type	Phthalocyanine
CAS No.	1328-53-6
EU No.	215-524-7

**PHYSICAL DATA**

Appearance	Green Powder
pH (2% aqueous)	5 ~ 7 ISO 787-9
Specific gravity	2.2 g/cm <sup>3</sup> ISO 787-10
Bulk volume	370cm <sup>3</sup> /100g ISO 787-11
Oil absorption	23 g/100 g ISO 787-5

**FASTNESS PROPERTIES**

Acid	5	DIN EN ISO 20105-A03
Alkali	5	DIN EN ISO 20105-A03
Water	5	ISO 2836
Ethanol	5	ISO 2836
Xylene	5	ISO 2836
MEK	5	ISO 2836
DOP	5	ISO 2836
Heat / 150°C, 10 min	5	ISO 787-21
Heat/ 210°C, 10 min	5	ISO 787-21
Light 1/3 SD	8	ISO 105-B01
Light 1/25 SD	8	ISO 105-B01

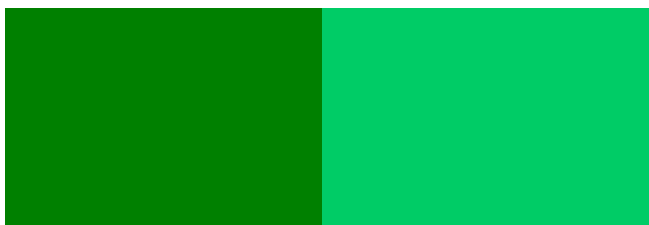
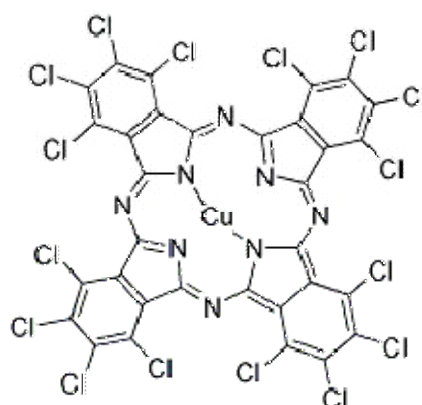
**STANDARD PACKAGING**

Paper bags	10 kg
Big Bags type C	On request

Our product specific end application information are based upon our current knowledge. They are presented without any representation or warranty concerning the suitability, performance or correctness of the product for a particular application or use. Significant variations can occur between test results and results obtained in actual use. We strongly advise that the customer test the product in the specific intended application under conditions expected during use.

**HEAD-OFFICE**

#174, GAEJWA-RO, GEUMJEONG-GU,  
 BUSAN, KOREA / 609-845  
 Tel.: +82 51 5231515~8  
 Fax: +82 51 5296326  
 Email: trade@ukseung.co.kr  
<http://www.ukseung.co.kr>

**FULL SHADE REDUCTION 1:25 TiO2**

**CHEMICAL STRUCTURE OF THE PIGMENT**


Molecular formular C<sub>32</sub>Cl<sub>16</sub>CuN<sub>8</sub>  
 Molecular Weight 1127.19

**APPLICATION RECOMMENDATION**

Oil Ink  
 Solvent Ink  
 Water Flexo Ink  
 Paint (Oil Base) recommended  
 Paint (Water Base)  
 Plastics recommended  
 Textile  
 Artist Color

**EUROPE OFFICE**

UK SEUNG Europe GmbH Kirchrainstr. 7  
 D-63762 Grossostheim, Germany  
 Tel. : +49 6026 9997875  
 Fax: +49 6026 9997881  
 Email: info@ukseung-europe.de  
<http://www.ukseung-europe.de>